


3) Spezielle Kombination aus Reihen- und Parallelschaltung Special combination of serial and parallel circuitry



Oder:
Or:

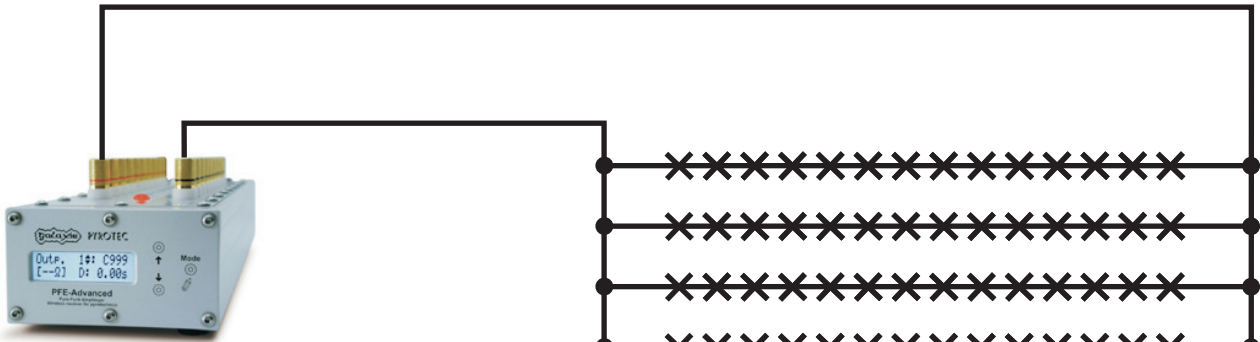

Verwenden Sie nur einen Anzünder-Typ für gesamte Anwendung.

Use the same type of e-match for the whole application.

Maximale Anzahl je Ausgang:

20 Linien mit je 14 Anzündern Typ A = 20 x 14 Anzünder = 280 Anzünder oder

10 Linien mit je 14 Anzündern Typ U = 10 x 14 Anzünder = 140 Anzünder

Maximum number per output:

20 lines each with 14 e-matches of type A = 20 x 14 e-matches = 280 e-matches or

10 lines each with 14 e-matches of type U = 10 x 14 e-matches = 140 e-matches

Maximale Anzahl pro Gerät:

10 Outputs: 10 x 280 Anzünder Typ A = 2.800 Anzünder, Zündung nacheinander;

10 Outputs: 10 x 140 Anzünder Typ U = 1.400 Anzünder, Zündung nacheinander;

100 Outputs: 100 x 280 Anzünder Typ A = 28.000 Anzünder,

100 Outputs: 100 x 140 Anzünder Typ U = 14.000 Anzünder,

Zündung nacheinander in Schritten von 0,01 Sekunde oder länger

Maximum number per device:

10 Outputs: 10 x 280 e-matches of type A = 2,800 e-matches, to be fired in a consecutive order;

10 Outputs: 10 x 140 e-matches of type U = 1,400 e-matches, to be fired in a consecutive order;

100 Outputs: 100 x 280 e-matches of type A = 28,000 e-matches,

100 Outputs: 100 x 140 e-matches of type U = 14,000 e-matches, firing in steps of 0.01 seconds or longer

